



La Plage - Cie Ziva asbl

FICHE TECHNIQUE LA PLAGE

Besoins Techniques


1. Espace plateau de 6m x 6m minimum
2. Hauteur minimum 3m
3. Prises électriques à proximité, rallonges et multiprises
Pas de prémontage, nous apportons tout ce dont nous avons besoin pour la lumière et le son. Circuit 16A - (si possible 2 circuits – Mais un seul est bien suffisant)
4. **Salle occultée** (Indispensable), pendrillonage à l'allemande.
5. **Petit gradinage** (Indispensable) – pour des condition optimale, la scène ne peut être plus élevée que le premier rang de spectateurs.
6. Jauge maximum 150 spectateurs
7. Le décor est transporté dans une camionnette 6m3. Merci de prévoir des emplacements de stationnements pour ce véhicule.
8. Un ou deux techniciens du lieu d'accueil pour le déchargement, le montage et le démontage
9. Durée 45 minutes (40 min spectacle + 5 min d'échange)
10. ATTENTION NOUS UTILISONS UNE MACHINE A FUMEE PENDANT LA SPECTACLE

Montage : (avec 1 ou 2 technicien(s) du lieu d'accueil)


- 1 service (3h) : Déchargement (30 min)
 Implantation décor (2 h)
 Pointage lumière et réglages son (30 min)

Démontage et chargement (avec 1 ou 2 techniciens du lieu d'accueil) (2h)

Plan de scène

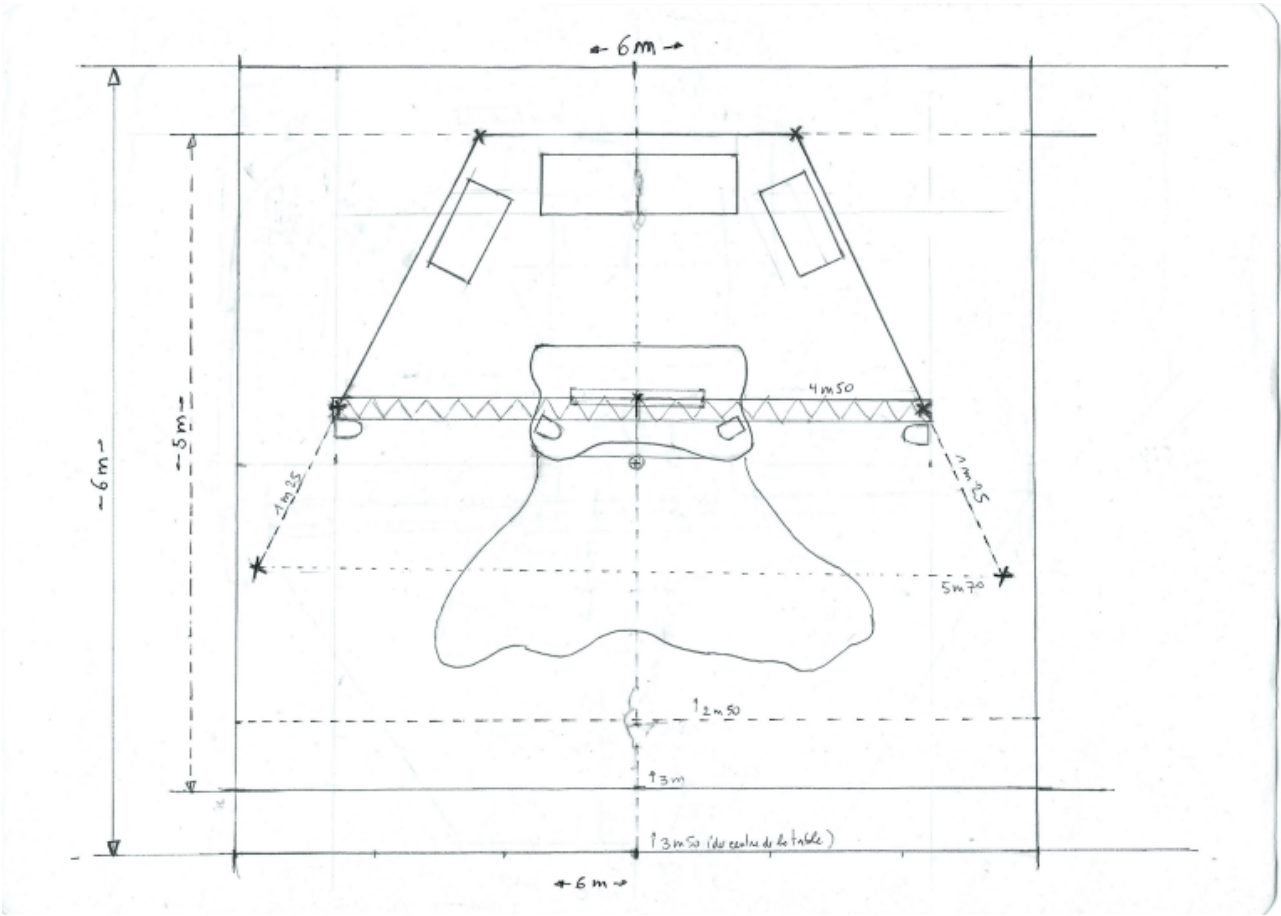

Plan d'éclairage (autonome- nous apportons notre matériel)

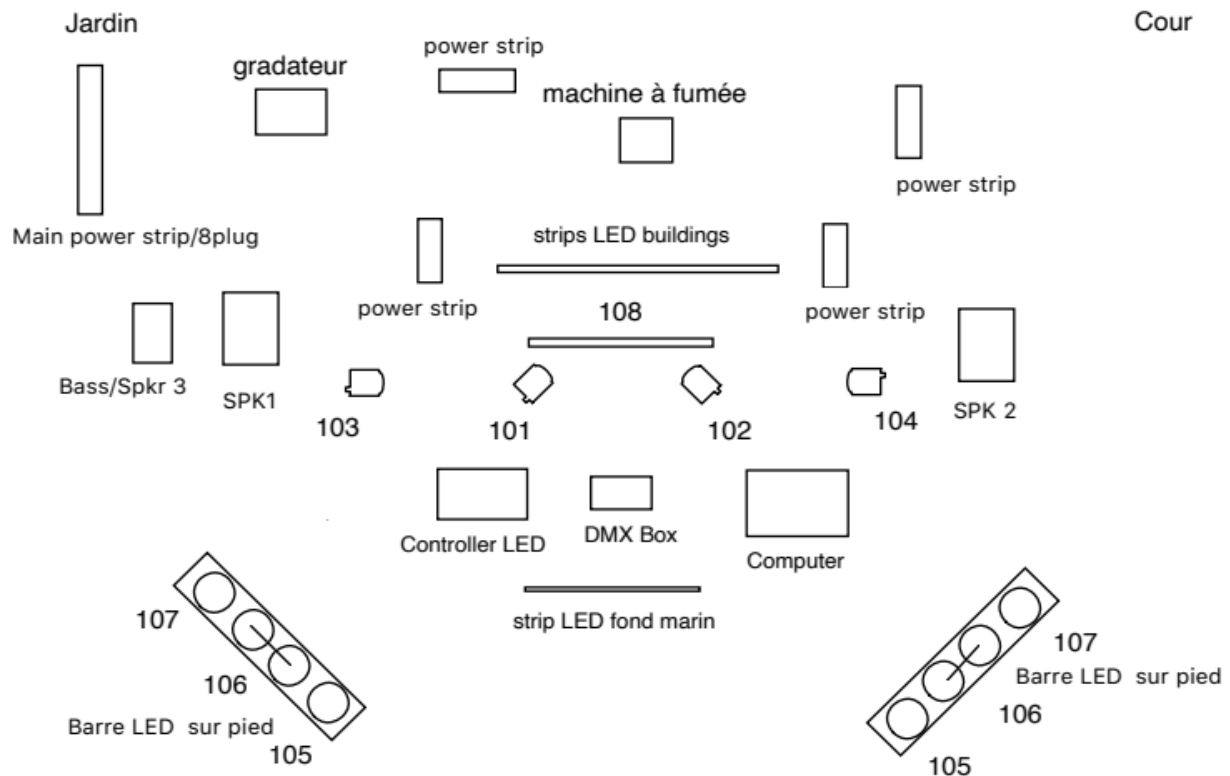

- 101 = PC Minim 1 -J- (photo 1) -> Ch1 vert (500w)
- 102 = PC Minim 2-C- (Photo 2) -> Ch2 orange (500W)
- 103 = PC Minim 3 -J- (Photo 3) -> Ch3 bleu (500W)
- 104 = PC Minim 4 -C-(photo4) -> Ch4 brun (500W)
- 105 = Barres Led avant C+J (exterieur cote salle) (photo 5)
- 106 = Barres Led avant C+J (centre couplé) (Photo 6)
- 107 = Barres Led avant C+J (interieur cote table) (Photo 7)
- 108 = Rampe Led Plafond

ADRESSES DMX : - Gradateur = 1->4

- Les 2 Barres Led avant C+J = 50 -> 77 (28 channels)
- La Rampe Led Plafond = 30 -> 33/53?
- La Machine à Fumée = 16
- Le Controleur Led = 80->109

ADDITIONNAL TECHNICAL INFORMATIONS LA PLAGE

List of technical equipment :

Computer MacBookPro + Power cable (CEE plug 7/7 Male - 220V)

Boitier DMX 5Pin out + adaptator XLR 5Pin Male (out) → 3 Pin Female (in)

Controller Led and transfo + power cable (CEE plug 7/7 Male - 220V) / (1Strip Led Fond marin et 3Strip Led Building)

1 strip led building + power cable (CEE plug 7/7 Male - 220V) + remote-controlled socket

2 Neons (Sea floor)

2 Led clamp spotlights + power cable (CEE plug 7/7 Male - 220V)

2 Led Bar 4 Spots RGB on tripod + power cable (CEE plug 7/7 Male - 110-240V CA, 50/60Hz)

1 Speaker (Bass) + power cable (CEE plug 7/7 Male - 220V)

2 Speakers (Activ / Passiv) + power cable (CEE plug 7/7 Male - 220V)

4 projecteurs MINI PC + power cable (CEE plug 7/7 Male - 220V)

1 barre LED 240/8 RGB + power cable (CEE plug 7/7 Male - 220V)

1 gradateur DDS-405 LC DMX 4 ch + power cable (CEE plug 7/7 Male - 220V)

1 Smoke-Machine

1 Power Strip (8 outlets) (connector CEE 7/7 male and sockets outlets CEE 7/3 Female)

1 Power Strip (5 outlets) (connector CEE 7/7 male and sockets outlets CEE 7/3 Female)

3 Power Strip (3 outlets) (connector CEE 7/7 male and sockets outlets CEE 7/3 Female)

6 extension cable 10 m (connectors CEE 7/7 mâle and CEE 7/3 Female)

3 extension cable 5 m (connectors CEE 7/7 mâle and CEE 7/3 Female)

1 extension cable 2 m (connectors CEE 7/7 mâle and CEE 7/3 Female)

4 Cable DMX 10 m (XLR male 3 PIN / XLR female 3 PIN – 110 Ohm)


1 Cable DMX 5 m (XLR male 3 PIN / XLR female 3 PIN – 110 Ohm)

1 Cable sound 5 m (2 x RCA (Cinch) red/ white male – 1 x mini Jack stereo 3,5 mm)

1 Cable sound 5 m (Jack 6,3 mm – Jack 6,3 mm 0,22mm²/AWG 24)

ALL CONNECTIONS POWER PLUG CEE 7/7 MALE and CEE 7/3 FEMALE (POWER SUPPLY 220V)

Main Power Strip (8 outlets) → Socket outlet of the room



1. Led Bar 4 Spots RGB on tripod Jardin + extension cable 10 m (=jaune)
2. Active Speaker (jardin) + extension cable 5m (=Gris)
3. Speaker Bass (jardin)
4. Led Bar 240/8 RGB DMX + extension cable 10m (= Rouge)
5. Dimmer*
6. Power Strip (5 outlets) Backstage **
7. Led Bar 4 Spots RGB on tripod Cour + extension cable 10 m (= Jaune+vert)
8. (none)

* Dimmer : CH 1 (vert) → PC1 (lighting stand jardin) + extension cable 10m = vert
CH2 (orange) → PC2 (lighting stand cour) + extension cable 10m = orange
CH3 (bleu) → PC3 (lighting stand tripod jardin) + extension cable 5m = bleu
CH4 (brun) → PC4 (lighting stand tripod cour) + extension cable (10m) = Brun

** Power Strip (5 outlets) Backstage : 1. Power Strip (4 outlets) Table jardin ***
2. Smoke – Machine + extension cable 2 m
3. Power Strip (4 outlets) Table cour****
4. Power Strip (3 outlets) behind curtain cour*****

*** Power Strip (4 outlets) Table jardin : 1. Transfo controller Led
2. Led clamp spotlight (shadows)

**** Power Strip (4 outlets) Table cour : 1. Building module 3 / remote-controlled socket
2. Neons Sea floor
3. Computer

***** Power Strip (3 outlets) behind curtain cour : 1. Led clamp spotlight (Favelas)
2. Dimmer Spot Audience + extension Cable
10m (=Blanc) (if necessary)

XLR CONNECTIONS (3 pin)

Ordinateur / usb / Boitier DMX (1 adaptator 5 pin to 3 Pin)
→ (cable 50cm – 3pin) Controller Led
→ (cable 10m) LedBar 4 spots RGB Jardin
→ (cable 10 m) LedBar 240/8 RGB lighting Stand
→ (cable 10m)LedBar 4 spots RGB Cour
→ (cable 10m) Dimmer
→ (cable 5 m) Smoke - Machine